

Autoplugin Therminal-F2

Version 10.6

**Technical Description
Installation Manual**

Rev. A

Table of Contents

1. Description.....	2
2. Possibilities.....	2
3. Package Content.....	2
4. Preparation for Work.....	3
5. Basic Functions.....	3
6. Connection.....	4
7. Plug-n-Play Connection.....	5
8. Permanent Connection.....	6
9. RCP Light-F2 Additional Functions.....	6
10. Troubleshooting.....	9
11. Glossary.....	12

Description

The **Autoplugin Therminal-F2** is a kit intended for remote control of the fuel-fired heater (parking heater, fuel operated heater, pre-heater), factory installed on **Ford Focus 2** (2004-2011), **Ford C-Max** (2003-2010) or **Ford Kuga** (2008-2012). The kit includes two modules: climatic GSM-module **Therminal-XC/XE/XF** and interface module **RCP Light-F2**. GSM-module receives commands from user's phone or smartphone and translates them to the RCP module, which controls the heater via CAN-bus.

Possibilities

- Heater remote control using SMS, via specialized application Therminal for Android (4.1 and higher) and iOS-based smartphones or by voice call
- Feedback about heater startup, stop and errors by SMS/ in app
- Embedded remote control of the heater with the car's remote control key
- Main battery protection from discharging inspecting voltage level and time of autonomous operation of the heater
- Plug-n-play or permanent connection
- Heater errors clearing

Package Content

1. GSM-module Autoplugin Therminal-XC (0501-1100), Autoplugin Therminal-XE (0501-1102) or Autoplugin Therminal-XF (0501-1103)

2. Autoplugin RCP Light-F2 module (0701-1110)
3. Interconnection cable
4. Permanent connection cable
5. Plug-n-play cable
6. Thermo sensor with cable
7. LED-button with cable
8. Technical Description and Installation Manual brochure
9. User Manual brochure

Preparation for Work

- Focus 2 (2004-2007), C-Max (2003-2006)

Turn on the ignition and select in driver information system (DIS) menu:
Your settings -> Aux.heater programming ->Instant control -> Auto

- Focus 2 (2008-2011), C-Max (2007-2010), Kuga

Start the engine and select in DIS menu:

Set>Menu -> Settings -> Auxiliary Heating -> On ->Off ->On (again)

Basic Functions

1. Refer to the **User Manual** to control the heater using mobile phone or smartphone.
2. To start the heater by using car's remote control key, press "Lock" button 3 times on the key. Time intervals between presses must not exceed 20 seconds. Car unlocking or time interval excess restarts the counter of "Lock" button presses. Every "Lock" button's pressing is confirmed with direction indicators flashing.
3. By default RCP is adjusted only to switch on the heater from remote control key. To switch off the heater from the key, change the setup item 3.3. As both the commands use the same combination of "Lock" presses, you should know a condition of the heater before you send a command. Therefore it is recommended to activate setup items 6.4 – 6.6 to see the heater's status by the means of direction indicators' flashing in the rearview mirrors. The possibility to stop the heater remotely may be useful in case of cancelation of a trip, including one programmed in the CIP's menu.
4. It is possible remotely disable heater timers, programmed in the CIP's menu. Use phone to send stop command when the heater is idle (not possible with car's remote control key). Starting the heater by any way or turning the ignition to "on" position enables CIP timers again.


Connection

RCP module needs that direct start / stop function for heater control are present in the CIP. Therefore it may be necessary to change configuration of the CIP by the means of Ford dealer equipment.

GSM-module is supplied without SIM card inside. The customer should buy a SIM card with subscription to local GSM provider services (SMS and GPRS are required).

May be some preparatory operations should be made with SIM before installation to the GSM-module:

1. Insert SIM to a phone or smartphone and disable PIN code acquire
2. Switch off 3G/4G services and send test SMS to another phone or smartphone and check that it successfully received

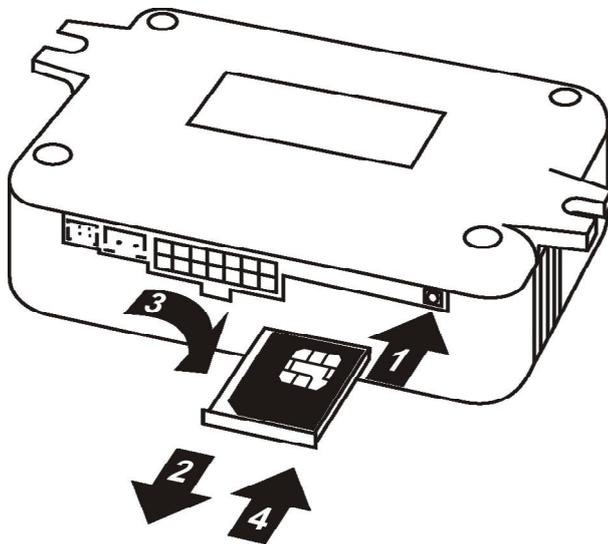

Picture 1

Choose tariff plans with non-expensive/pre-paid SMS traffic for SMS control or with pre-paid mobile data traffic for control via Internet (50-100 Mb per month is enough). Combine phone account with GSM module account if possible. Android application allows use both the mobile data and SMS, iOS application allows use only the mobile data.

Install SIM card into the GSM-module, as shown at the picture 1. The operation should be performed with unplugged power from the GSM-module. Press with a thin blunt object (philips screwdriver, pen, etc.) on the SIM-holder ejector pushbutton (1), pull for the SIM-holder and pull the holder out of the housing (2). Then put the SIM into the holder to commit (3) and insert the holder back to the housing up to the stop (4).

We recommend firstly use Plug-n-Play connection to set up the Thermanal.

Plug-n-Play Connection

This type of connection uses OBD-II service socket. It placed on the dashboard, in the deepening lower the lighting control switch.

- Take interconnection cable with attached RCP Light module and connect it to the GSM-module by two connectors (14-pin black and 2-pin white). Take outer button and attach it to the GSM-module. Take Plug-n-Play cable and temporary connect it with interconnection cable. Turn ignition on, then insert OBD jack into car's service socket, wait about 10 seconds and turn ignition off. Wait for GSM-module boot during 30 seconds and then check that the GSM-module ready to receive commands (button's LED flashes 5 or 6 times in series).
- Launch the Quickstart procedure (see **Brief User Manual** for details). When the procedure will be completed make a voice call on GSM-module number and make sure the heater is started. You can detach outer button if you don't need to install it.
- Find space inside the dashboard for kit placement. Secure modules and cables inside the dashboard with straps. GSM module can be fixed with adhesive tape or can be fixed by straps. For Thermanal-XC version pay attention that internal antenna of GSM-module (placed at the housing's side, opposite to SIM-holder) doesn't stay close to metal parts of the dashboard. For Thermanal-XE/XF versions connect all antennas' connectors to the GSM-module, according to connectors' colors. For Thermanal-XF the combined GSM/GPS/GLONASS antenna has a magnetic base which can be attached to metal parts. Or can be fixed with adhesive tape. It is important to point the antenna toward the sky and don't cover it by metal parts from the sky side.
- GSM-module can indicate GSM signal level by the button embedded LED. This mode can be useful to find an appropriate location of the GSM-module (Thermanal-XC) or outer antenna (Thermanal-XE/XF). To activate the mode press and hold the button until the embedded LED flashes from 15 to 20 times, then release the button. The LED starts indicate GSM signal level by frequent flashes (1-5) in series. Signal status will be refreshed every 10 seconds.
- Before final fixation of the kit connect Plug-n-Play cable to the interconnection cable one more time to be sure that cables' length is enough to make connection into OBD-II socket. Shorten excess length of the Plug-n-Play cable by straps and fix all the cables of kit inside the dashboard. Finally connect Plug-n-Play cable to the OBD-II service socket.

Permanent connection

It is recommended to install Autoplugin Therminal permanently under the dashboard.

Make all the steps listed in chapter above. Then take permanent connection cable and connect free ends of permanent connection cable to the car's wiring in accordance with Table 1. Use quick splice connectors for wires connection.

Connect outer thermo sensor to the GSM module (instead of connector with single orange wire of interconnection cable) and fix it with adhesive pad at the place where temperature will be registered.

Shorten wires of permanent connection cable by place, as required. Plug permanent connection cable to the interconnection cable. Fix cables with car's harnesses by straps.

Table 1. Permanent connection cable description

Permanent cable pin number	Wire colour	Signal	Connection point
6	Black	Ground	Connects to a terminal where permanent negative potential of the battery is present (ex. to the black-white wire of service socket, pin 4).
3	Red-white	Battery +	Connects to a terminal where permanent positive potential of the battery is present (ex. to the yellow-red wire of service socket, pin 16)
4	Green-yellow	CAN-L	Connects to the blue wire of CAN-bus (ex. to the service socket's pin 11)
1	Green	CAN-H	Connects to the grey wire of CAN-bus (ex. to the service socket's pin 3).

RCP Light-F2 Additional Functions

Some functions, such as start and stop of the heater by using remote control key, boost heat mode control and indication by direction indicators, are implemented in RCP Light module. To control these functions, enter the module into Setup mode and activate corresponding setup item (see Settings table 2).

A programming button and the brakes pedal are used to enter Setup mode and to change the settings. Use front passenger's window close button on the driver's door control panel as a programming button.

It is necessary to stop the engine and the heater before making adjustments. Turn the ignition on, press and hold the brakes pedal. Then press the programming button 3 times. Both direction indicators in the CIP confirm entering to the setup mode with 2 flashes. Release the brakes pedal finally.

Each setup item in the settings table is a 3-digit code. To enter a digit of code, shortly press the button so much times, as corresponds to a digit. The LED and the direction indicators symbols in the CIP confirm each button press: the LED briefly goes off, the left direction indicator flashes one time when the first or the third digit of code entered, the right direction indicator - when the second digit of code entered. To complete digit entering, press and release brakes pedal. The CIP confirms it with one flash of both direction indicators simultaneously. When all three digits entered, the module checks the code for validity and confirms it with the direction indicators flashing. The both direction indicators flash twice simultaneously in case of valid code and flash twice alternately in case of invalid code.

If entered digit is not correct, press and release brakes button until the module indicates an error. Enter the code once more in that case. Several codes can be entered without exit of setup mode.

Turn the ignition off to exit setup mode. New settings are saved in nonvolatile memory of the module and stored there regardless of whether the module is connected or not. **Attention:** If you start the engine without exit Setup mode, new settings will not be saved in memory.

To reset the module to the factory settings, enter the code 8.1.1. Both direction indicators in the CIP should flash three times, confirming command execution. Then the module exits Setup mode and restarts.

To clear all errors in heater memory and thus unblock the heater, enter the code 9.1.1. Both direction indicators flash five times confirming errors clearing. If unblocking of the heater is impossible, the indicators flash five times alternatively. **Pay attention:** when you apply unblocking function for the first time, RCP remembers VIN code of the car. In the future unblock function will work only for this car.

* Factory setting

Recommended settings marked in Italics

Settings Table (2)

1. Boost Heat Mode (Auxiliary Heating) Control ¹	1.1. Additional engine heating in Boost Heat mode	1.1.1 *Enabled by the module 1.1.3 Disabled by the module permanently 1.1.4 Disabled all the time, except in the case when the heater has operated before the engine start
	1.2. Additional engine heating disabling by coolant	1.2.1 *Not applied 1.2.2 Higher than 0 degrees 1.2.3 Higher than +10 degrees

	temperature (in Celsius degrees)	1.2.4 Higher than +20 degrees 1.2.5 Higher than +30 degrees 1.2.6 Higher than +40 degrees 1.2.7 <i>Higher than +50 degrees</i> 1.2.8 Higher than +60 degrees 1.2.9 Higher than +65 degrees 1.2.10 Higher than +70 degrees
3. Heater remote control by using remote control key	3.1. Control button action	3.3.1 *Heater start only 3.3.2 Start for idle heater, stop for operated heater
	3.2. Number of control button presses for heater control	3.2.1 Combination is disabled 3.2.2 Two presses 3.2.3 * <i>Three presses</i> 3.2.4 Four presses 3.2.5 Five presses 3.2.6 Six presses
6. Indication of heater status by using direction indicators in rearview mirrors	6.1. Indication of successful startup of the heater from remote control	6.1.1 *Off 6.1.2 Series of double flashes
	6.2. Indication of unsuccessful startup of the heater from remote control	6.2.1 *Off 6.2.2 Series of single flashes
	6.3. Indication of heater operation, when starting source is a phone	6.3.1 *Off 6.3.2 On
	6.4. Indication of heater operation, when starting source is the CIP (direct or timer start)	6.4.1 *Off 6.4.2 On
	6.7. Flashing frequency for 6.3-6.4 Setup items	6.7.1 One flash within 3 sec 6.7.2 One flash within 5 sec 6.7.3 * <i>One flash within 10 sec</i> 6.7.4 One flash within 15 sec
8. Settings reset		8.1.1 Apply default settings
9. Service menu		9.1.1 Clear all errors in heater's memory, resulting heater unblocking

¹ – It is necessary to enable auxiliary heating in DIS for extended boost heat mode possibilities (settings 1.2, for the cars with diesel engines only): Settings > Convenience > Aux heater > On

⁴ – Signals appear only during heater autonomous operation

⁷ – Only for car's remote control key

Troubleshooting

If you have problems with heater startup try sequentially start the heater from the key, then from the button and finally – from phone. When the heater doesn't start at all, make diagnostics starting with the RCP Light. If the heater starts from the key, make diagnostics of the GSM-module.

- RCP Light diagnostics

RCP-module in the kit is responsible for command translation to and from the CAN-bus. It has the LED indicator on the side, opposite to the connector.

If a run-time error occurs during heater operation, RCP module informs about the error code with LED flashing. The number of flashes in series corresponds to the error code. See table 3 for the codes description and possible solutions.

Table 3

Error Code	Error Description	Possible Reasons of Error Appearance	Solutions
1	Start command cannot be executed	The heater is not adjusted in DIS menu (or has been reset to unadjusted condition after battery discharging or disconnection)	See chapter Preparation for Work to adjust the heater
2	No answer from the heater followed the start command	The engine is hot (no need to pre-heat)	Let the engine cool down below +75 Celsius degrees
		The heater hasn't finished previous operation cycle yet (you can hear the noise from the air blower fan)	The heater starts when previous cycle of operation is fully completed
		Fuel level in the fuel tank is close to empty ("Fuel Low" warning indicator is illuminated in the CIP)	Refuel the car

		The heater was blocked after 5 unsuccessful starts	Try to start the heater from CIP menu. If it doesn't start up, make diagnostics of the heater. Then reset heater errors
5	Unsuccessful startup	The heater was switched off spontaneously at startup	Make diagnostics of the heater if the error appears again
6	Operation cycle too short	The heater was switched off spontaneously	Make diagnostics of the heater if the error appears again
8	CAN-bus error	There is a problem with module connection to the CAN-bus	Check for the module connection
9	Settings error	Settings have been stored in RCP's memory incorrectly	Reset the settings (8.1.1), readjust the module
11	Heater no connection	The heater is unplugged or out of order	Make diagnostics of the heater

○ GSM-module diagnostics

If the heater doesn't start from the button, check all the kit connections. Startup from the button operates independently from GSM network status. In case when the heater starts from the button, but doesn't start via GSM (SMS, voice call or app) use GSM-module indication for diagnostics: press and hold the button until the embedded LED flashes from 5 to 10 times, then release the button. GSM-module goes to status indication mode. Status indication mode also becomes active for 2 minutes after boot or restart. See table 4 for details.

Table 4. GSM-module indication

Number of flashes in series	GSM-module status	User action required
2	Not available for GSM control	<ol style="list-style-type: none"> 1. Check for presence of SIM in GSM module 2. Check that SIM installed correctly 3. Install SIM into a phone and disable PIN request 4. Check that GSM-module number is active: make a voice call and wait for «busy» tone² 5. Make sure that the GSM-module hasn't went to Shutdown mode by reason of battery discharge

3	Waiting for GSM ready	GSM-module is temporary not available. No user action required.
4	Waiting for GSM registration complete	GSM-module is temporary not available. Possible reasons: no available networks (no signal, roaming prohibited), SIM locked by the provider. Change button indication mode to check GSM signal strength level
5 or 6	Ready for command reception	No user action required

¹*Switch off GSM-module's power supply before the operation*

²*Heater start will be performed. Make the second voice call to stop the heater*

Glossary

CAN - Control Area Network (digital network for data transfer in vehicles)

CIP - Combined Instrument Panel

GSM – Global System for Mobile

GPRS – General packet radio service, packet oriented mobile data service

LED - Light Emission Diode

RCP - Remote Control Plug-in (electronic module for heater remote control)

SIM – Subscriber Identification Module

SMS – Short Message Service